




DROMEAS

Mobile Sound Absorbing Panel MONO

Partition

The thickness of the sound-absorbing partition panels is 30mm. The inner frame is made of steel tube with a cross section of 30x30mm and a special sound-absorbing 25mm thick polyester panel lined with polyester wadding on each side. It is externally lined with a suitable sound-absorbing fabric of the customer's choice.

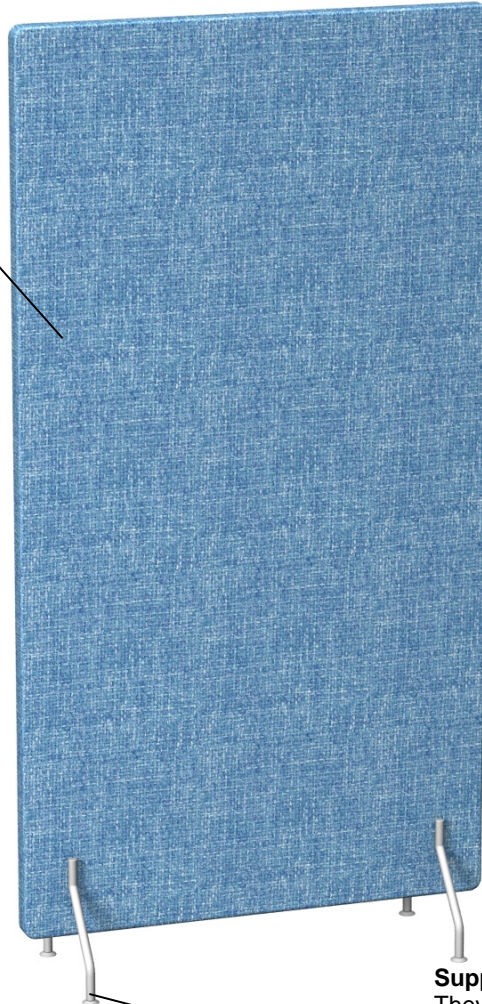

Support

They are based on special chrome-plated steel soles and have the ability to connect in a straight line.



<https://www.dromeas.gr/>



DROMEAS

Table Top Sound Absorbing Panel MONO

The table top partitions have a thickness of 30mm and are made of an inner frame made of steel tube with a cross section of 30x30mm, a special sound-absorbing polyester panel 25mm thick, lined with polyester wadding on each side. It is externally lined with a suitable sound-absorbing fabric of the customer's choice.



Support

Metal parts angles are used for the support of the panels which are painted with electrostatic powder paint.




<https://www.dromeas.gr/>



DROMEAS

Wall Mounted Sound Absorbing Panel MONO

They are available in rectangular, square and round shape. For the square and rectangular shape there is also the possibility of construction with a perimeter aluminum frame.

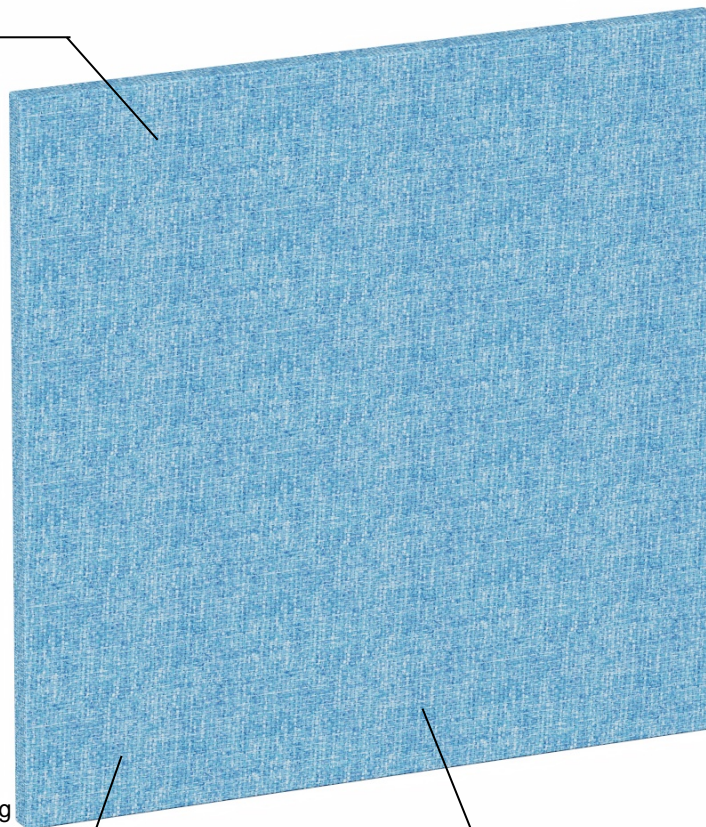

The thickness of the sound-absorbing partitions is 25mm and they are made of special sound-absorbing polyester material coated with a suitable sound-absorbing fabric of the customer's choice.

Support

They are hung on the wall with suitable connection materials or on the ceiling with a special hanging system.



<https://www.dromeas.gr/>

COLOR CHART



CERTIFICATIONS

EN ISO 354:2003

